

FLAT RECTANGULAR FOAM RUBBER CUPS WITH SUPPORT

Foam rubber cups are made with a special compound called GERANIUM indicated with OF, with a density that allows them to grip uneven and very rough surfaces and still maintain their elasticity even after many working cycles.


These foam rubber cups have a self-adhesive side for a quick fixing to their support. These cups have been designed for handling loads with raw or very rough surfaces (sawn, bushhammered or flamed marble, textured, non-slip or profiled metal sheet, striped plexiglas, raw cement manufactures, garden tiles with fret, etc.) and for all those cases in which traditional cups cannot be used. In case of lubricated gripping surfaces, we recommend using neoprene foam rubber NF.

The working temperature ranges from -40 °C to +80 °C for GERANIUM foam rubber OF and from -20 °C to +80 °C for neoprene foam rubber NF.

Their supports are made with anodised aluminium and they are provided with a central threaded hole to allow its fastening to the machine.

Larger supports, on the other hand, are provided with two threaded holes equidistant from the centre, for the possible insertion of guiding, anti-rotation pins.


For the spare part, all you have to do is request the cup indicated in the table in the desired compound.

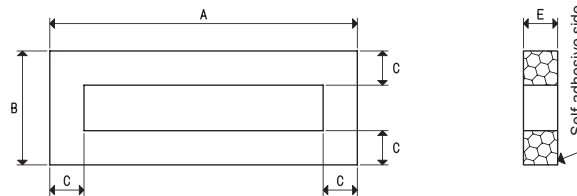

CUPS


Art.	Force Kg	A	B	C	E
01 107 75 *	9.0	107	75	15	15
01 135 50 *	6.0	135	50	15	15
01 135 60 *	8.0	135	60	15	15

* Complete the code indicating the compound: OF= geranium foam rubber; NF= neoprene foam rubber

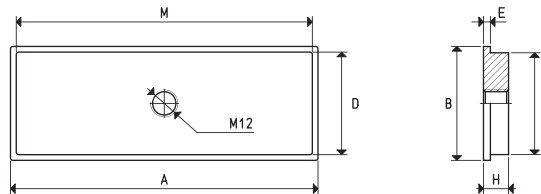

SUPPORTS

Art.	A	B	D	E	H	M	N	Support material	Cup art.	Weight g
00 08 34	107	75	70	3	11	102	70	aluminium	01 107 75	215.5
00 08 144	135	50	45	3	11	130	45	aluminium	01 135 50	176.1
00 08 59	135	60	55	3	11	130	55	aluminium	01 135 60	218.4


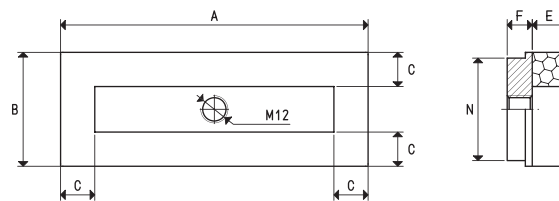


CUPS WITH SUPPORT

Art.	Force Kg	A	B	C	E	F	N	Cup Art.	Support. Art.	Weight g
08 107 75 *	9	107	75	15	15	11	70	01 107 75	00 08 34	229.5
08 135 50 *	6	135	50	15	15	11	45	01 135 50	00 08 144	190.6
08 135 60 *	8	135	60	15	15	11	55	01 135 60	00 08 59	233.0

* Complete the code indicating the compound: OF= geranium foam rubber; NF= neoprene foam rubber


FLAT RECTANGULAR FOAM RUBBER CUPS WITH SUPPORT

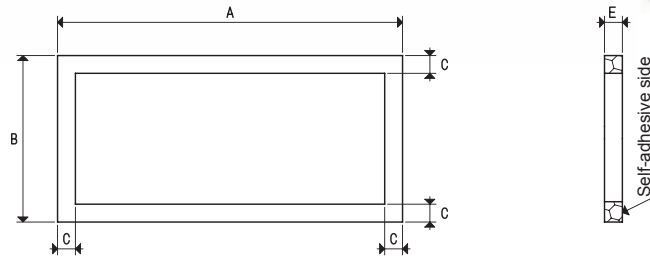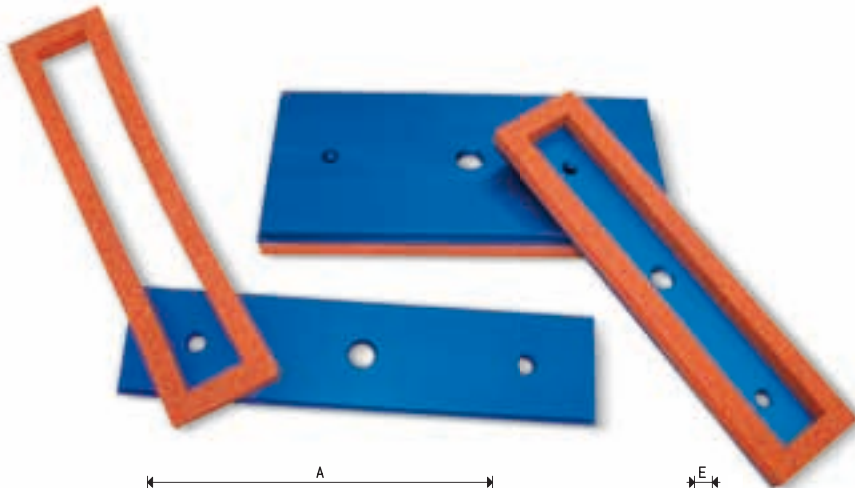

CUPS


Art.	Force Kg	A	B	C	E
01 290 68 *	25	290	68	15	15
01 290 140 *	72	290	140	15	15

* Complete the code indicating the compound: OF= geranium foam rubber; NF= neoprene foam rubber

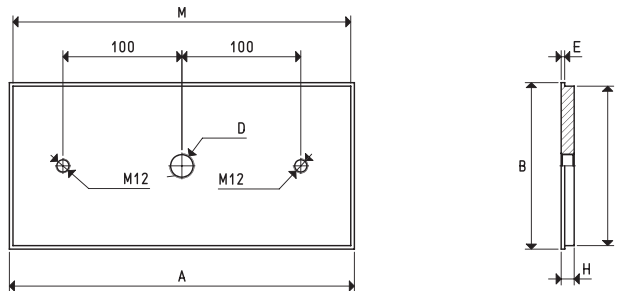

SUPPORTS

Art.	A	B	D Ø	E	H	M	N	Support material	Cup art.	Weight Kg
00 08 116	290	68	G3/8"	3	11	284	62	aluminium	01 290 68	0.53
00 08 117	290	140	G1/2"	3	11	284	134	aluminium	01 290 140	1.13

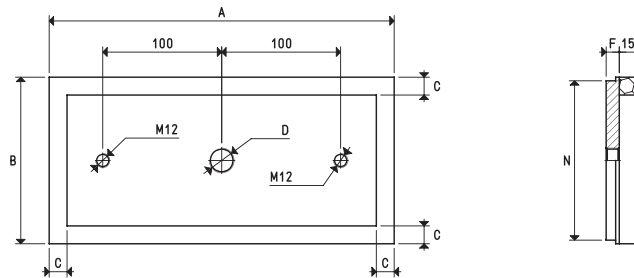

CUPS WITH SUPPORT

Art.	Force Kg	A	B	C	D Ø	F	N	Cup Art.	Support Art.	Weight Kg
08 290 68 *	25	290	68	15	G3/8"	11	62	01 290 68	00 08 116	0.56
08 290 140 *	72	290	140	15	G1/2"	11	134	01 290 140	00 08 117	1.15

* Complete the code indicating the compound: OF= geranium foam rubber; NF= neoprene foam rubber

FLAT RECTANGULAR CUPS WITH VULCANISED SUPPORT, FOR CLAMPING GLASS AND MARBLE


The manufacturers of glass and marble machining centres require increasingly accurate and safe clamping systems. This has led us to creating this new series of cups.

They are vulcanised onto a steel support and are provided with a hole in the centre for vacuum connection or for a BALL VALVE, as well as with 2 holes on the internal circumference for housing allen screws.

Their extremely flexible lip allows them to easily adapt themselves to the sheets to be held, with no risk of deformation or rupture, even for the thinnest ones. The particular internal support plane of these cups ensure a high friction coefficient with the gripping surface and a considerable grip on wet glass and marble sheets, thanks to the water drainage. All this guarantees a firm and safe grip.

Furthermore, these cups feature the highest accuracy of their thickness, whose nominal height has a tolerance of only five hundredths of millimetre.

They are normally produced with oil-resistant rubber A, but they can be ordered in other compounds, listed at page 21, upon request and in minimum quantities to be defined in the order.

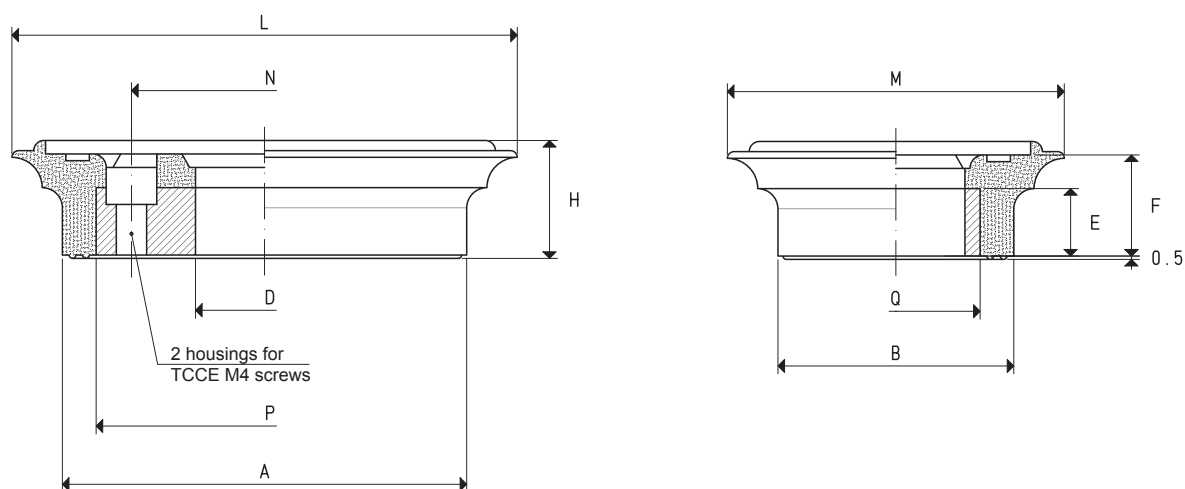

CUP WITH VULCANISED SUPPORT

Art.	Force Kg	A	B	D ∅	E	F	H	L	M	N	P	Q	Support material	Weight g
08 50 75 A	7.5	60	35	20.5	10	15	17.5	75	50	39.5	50	25	steel	92